


EverBrite


3000LM RECHARGEABLE LED WORK LIGHT

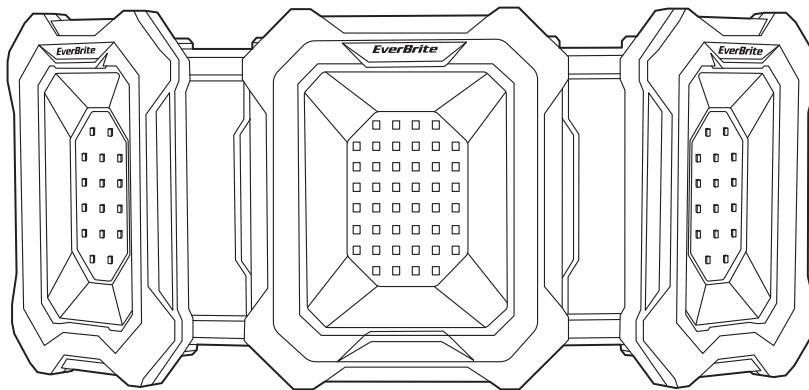

User Manual

Thank you for purchasing EverBrite products, please read this manual carefully before use, and keep it for future reference!

IN THE BOX

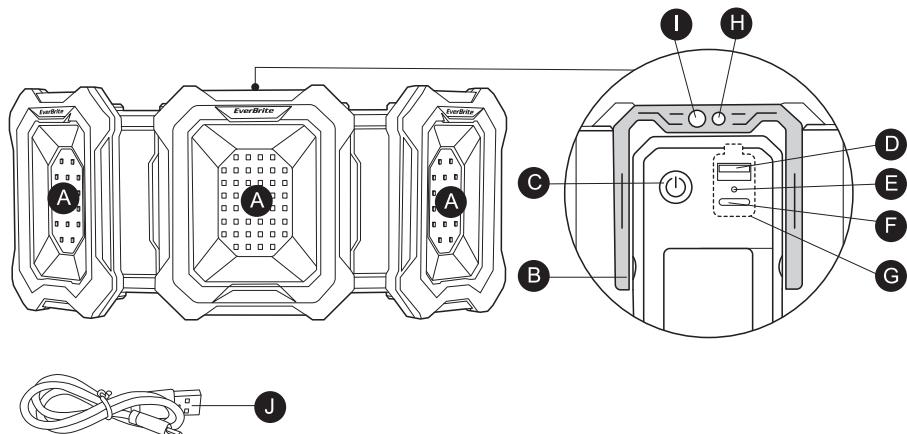

Part	Description
A	LED Light
B	Adjustable Stand
C	On/Off Switch Button
D	USB Output Port
E	Input/Output Charging Indicator
F	Input Charging Port (Type C)
G	Rubber Cover
H	Screw Port (1/4" Bolt Fit for It)
I	Φ 8mm Mounting Hole
J	Type C-USB Charging Cable

When unpacking the box, do not discard any packaging materials until all of the contents are accounted for:

1. 1 x Work Light
2. 1 x Type C-USB Charging Cable
3. User Manual

PARAMETER DESCRIPTION

Dimensions	440 x 172 x 52 mm / 17.3 x 6.8 x 2.1 in.
Weight	1070g / 37.7oz
Material	ABS + PC
Brightness	3000 Lumens
LED Life	50,000 hours or more
Battery	Built-in 3 x 3.7V 2600mAh 18650 rechargeable lithium batteries, charged with standard mobile phone charger (5V 2A)
Working Hours	Last for 3.5 - 8 hours after fully charged
Input Charging Port	TYPE-C Charging Port (Max 5V==2A)
Output Charging Port	USB Output Charging Port (Max 5V==1A)
Charging Time	About 5.5 hours

	High	Med	Low
 Brightness (LM)	3000LM	1500LM	1000LM
 Run Time (hrs)	3.5H	5.5H	8H
 Beam Distance(m)	80M	65M	55M

- The above-mentioned parameters tested based on ANSI FL1-2009 standard, may vary between lights, batteries and environments.

Product Features

- 3 Lighting Modes: Meet different daily uses.
- Adjustable Heads: This work light is equipped with two 180 degrees adjustable head, which can be adjusted up to 360 degrees, meeting the required brightness and lighting range according to your lighting needs.

3. Screw Port and Mounting Hole: There is a screw port and a mounting hole on the stand of the work light. You can connect the work light to a tripod (not included) through the screw port or the mounting hole.
4. Rechargeable & Mobile Charger: You can plug provided Type C-USB cable into your car USB port or laptop for recharging. Even better, you can charge your cell phone or other electronic devices using this rechargeable work light as a mobile charger in emergency.

OPERATING INSTRUCTIONS

1. Charging the Work Light

Please turn off the work light before charging. Open the Rubber Cover (G) on the back of the work light and plug the Type C-USB Charging Cable (J) into the Input Charging Port (F). Connect it to any 5V USB port such as power adapter, power bank, computer USB port etc.

- **Charging:** RED light
- **Fully Charged:** GREEN light
- **Charging Time:** About 5.5 hours

2. Charging External Devices (use as Power Bank-Rated Capacity 7800mAh)

① Open the Rubber Cover (G) on the back of the work light and plug your USB Charging Cable (not included) into the USB Output Port (D).

② Connect the Charging Cable to your device such as smartphone, tablet etc.


- **Charging:** BLUE light



NOTE:


No Power:

The **BLUE light is not on**. Stop charging your device **IMMEDIATELY** and charge the work light.

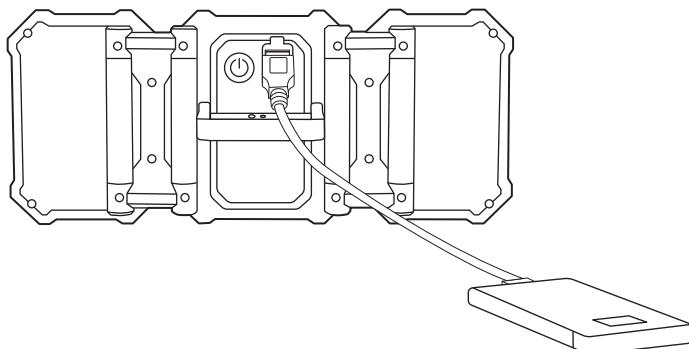

3. Adjusting the Light Direction


To adjust the light direction, simply rotate the work light head to desired position.

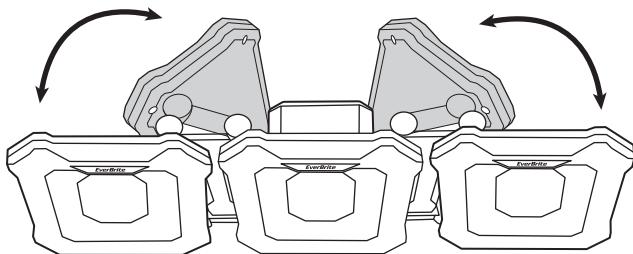

4. Mounting the Work Light to the Tripod


Option 1: Mounting with Screw Port

To attach the work light, insert the bolt of the tripod(not included) into the screw port (H) of the adjustable stand(B), then tighten the bolt until the work light into place.

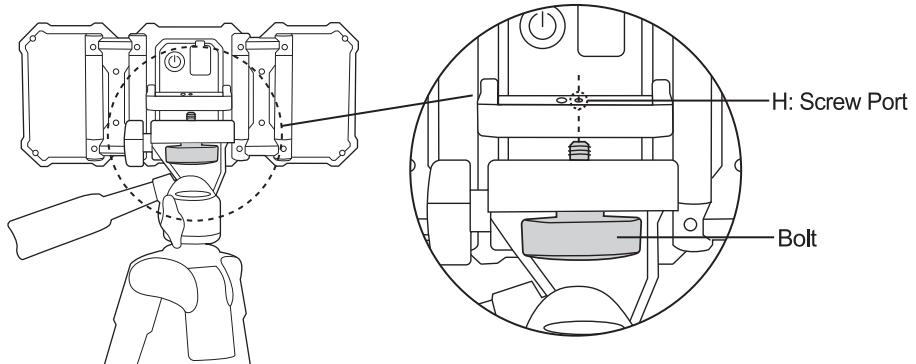

Option 2: Mounting with Φ 8mm Mounting Hole

- ①Unscrew the bolt from the tripod(not included).
- ②Place the work light over the the tripod(not included).
- ③Align and fasten the work light to the tripod(not included) with the bolt.

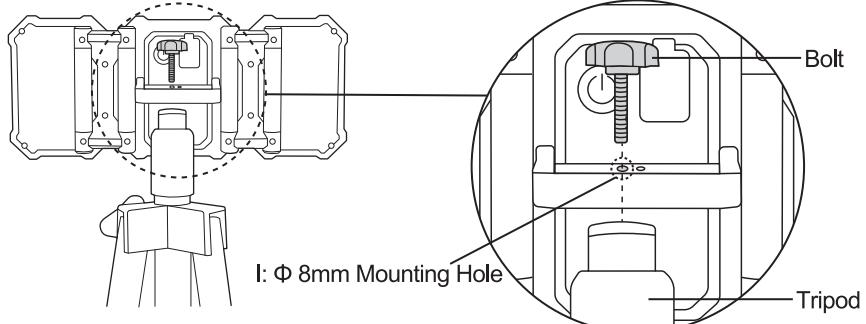

5. Operate the Work Lights

Press the Switch Button (C) to cycle through 3 modes: **HIGH - MEDIUM - LOW - POWER OFF**.



NOTE: Do not operate the work light while charging. The work light does not work when plugged into charge.

USAGE AND MAINTENANCE

- Battery comes 50-80% charged so they can be used right away, however it is recommended that you fully charge the battery when received.
- Once fully charged, be sure to disconnect the USB charging cable.
- Recharge a stored battery every three months to maintain optimum performance of the battery.
- Do NOT attempt to open battery.
- Do not operate the light in explosion hazardous areas or in aggressive environments.

WARNING

1. The work light projects a very bright beam of light and can cause eye damage to the user or others. Avoid shining the light directly into anyone's eyes.
2. DO NOT use the charge-out feature in excess of its output rating. Overload outputs above rating may result in a risk of fire or injury to persons.
3. Always keep the work light away from any flammable surface or materials.
4. DO NOT continue using or attempt to charge product if it 1) has been punctured or damaged, 2) exhibits any abnormal characteristics such as excessive heating or swelling, or 3) emits an odor.
5. Unplug from outlet when the light is not charged and before servicing or cleaning. This will reduce the risk of electric shock.
6. Do not use a pressure washer to clean this product.
7. The work light is NOT TOY - not recommended for use by children without supervision. Keep out of reach of children.
8. Never dispose of the lithium battery in fire, as they may leak and explode.
9. Dispose according to local, state, or federal regulations.
10. Any changes or modifications to this work light not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

ENVIRONMENTAL PROTECTION



Do not dispose with domestic waste. Use special collection points for sorted waste. Contact local authorities for information about collection points. If the electronic devices would be disposed on landfill, dangerous substances may reach groundwater and subsequently food chain, where it could affect human health.



Distributed by:
Hangzhou GreatStar Industrial Co., Ltd
No.35 Jiuhuan Road, Jiubao Town,
Hangzhou 310019, China
www.greatstartools.com
Made in China