


E011171A

EverBrite

ZOOMABLE ALUMINUM LED FLASHLIGHT

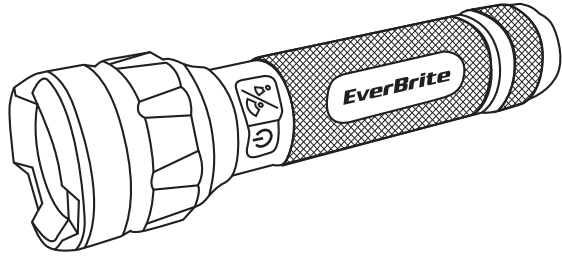


User Manual

Thank you for purchasing EverBrite products, please read this manual carefully before use, and keep it for future reference!

1

IN THE BOX

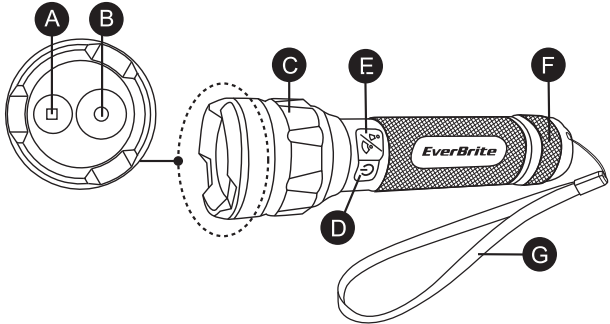

Part	Description
A	Floodlight LED
B	Spotlight LED
C	Anti-roll Body
D	On/Off Switch Button
E	Button for Zoom/Strobe
F	Tail Cap
G	Lanyard

When unpacking the box, do not discard any packaging materials until all of the contents are accounted for:

1. 1 x Aluminum LED Flashlight

2. 3 x AAA Alkaline Batteries

3. User Manual

2

PARAMETER DESCRIPTION

Dimensions	L145.5 x Φ 42mm / L5.71 x 1.65in.
Weight	150g / 5.3oz (without batteries)
Material	Aluminium Alloy Steel
Light Source	OSRAM LED
Brightness	500 Lumens
LED Life	50,000 hours or more
Working Hours	Last for 4 hours after fully charged

	Floodlight +Spotlight	Floodlight	Spotlight	Strobe
Brightness (LM)	500LM	300LM	400LM	/
Run Time (hrs)	3.5H	4H	4H	/
Beam Distance(m)	100m	50m	100m	/

■ The above-mentioned parameters tested based on ANSI FL1-2009 standard, may vary between lights, batteries and environments.

3

BATTERY INSTALLATION

Fig. 1


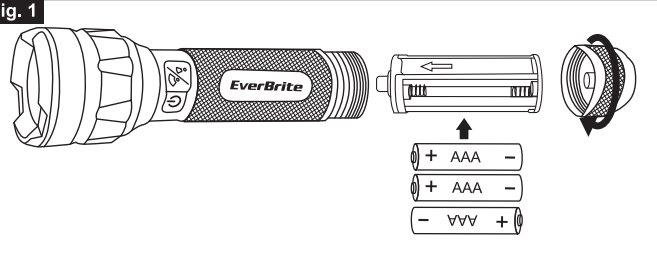


Fig. 2

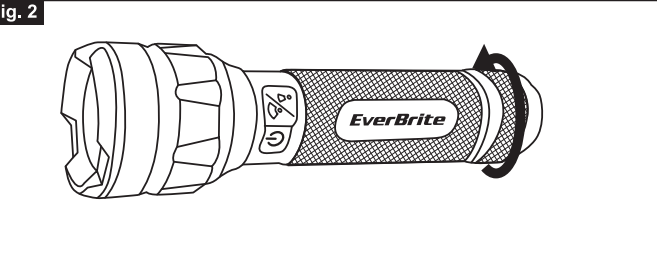

1. Unfasten tail cap in a counterclockwise direction and remove battery holder(Fig.1).

2. Insert 3 x AAA batteries following the correct polarity (+,-) marked on the battery holder(Fig.1).

3. Insert the battery holders back into the flashlight according the arrow “←” marked on the battery holder(Fig.1).

4. Then screw the tail cap back on(Fig.2).

4

OPERATE THE FLASHLIGHT

ON/OFF Switch Button:
Press the switch button **D** to **Turn ON/OFF** the flashlight.

Button for Zoom/Strobe:

1). **Spotlight and Floodlight Adjustable**

■ With the light on, press the button **E** to cycle through 2 modes: **FLOODLIGHT - SPOTLIGHT.**

■ With the light on, hold down the button **E** more then 1 second to regulate between spotlight and floodlight , meamwhile it will adjust the light brightness.When release the button **E** , it will stay the current brightness.

NOTE:

■ The time for entire process to regulate between spotlight and floodlight is about 4S±0.5S.

2). **Strobe Mode:**

■ With the light on, double click the button **E** to activate **Strobe Mode**. Then press the button **E** to recall the previously used light mode.

Short Press	On/Off	Floodlight/Spotlight
Double Click	/	Strobe
Long Press	/	Dimming Mode

USAGE AND MAINTENANCE

1. Disassembling the sealed head can cause damage to the light and will void the warranty.

2. EverBrite recommends using excellent quality battery.If the light will not be used for an extended period, remove the battery, or the light could be damaged by electrolyte leakage or battery explosion.

3. Long-term use can result in O-ring wear.To maintain a proper watertight seal replace the ring with an approved spare.

5

WARNING

1. The flashlight project a very bright beam of light and can cause eye damage to the user or others. Avoid shining the light directly into anyone's eyes.

2. THE flashlight are NOT TOY - not recommended for use by children without supervision. Keep out of reach of children.

3. NEVER mix old and new batteries or different brands of batteries. Replace all batteries at the same time.

4. NEVER mix alkaline,standard (carbon-zinc), rechargeable (nickel-cad-mium) batteries with this product.

5. NEVER dispose of batteries in fire, as they may leak and explode.

6. Non-rechargeable batteries are not to be recharged.

7. Dispose according to local, state, or federal regulations.

ENVIRONMENTAL PROTECTION

Do not dispose with domestic waste. Use special collection points for sorted waste. Contact local authorities for information about collection points. If the electronic devices would be disposed on landfill, dangerous substances may reach groundwater and subsequently food chain, where it could affect human health.

Distributed by:

Hangzhou GreatStar Industrial Co., Ltd

No.35 Jiujuan Road, Jiubao Town,

Hangzhou 310019,China

www.greatstartools.com

Made in China

6